

# Modular system with covers in stainless steel AISI 304 / AISI 316L

## Variofix shallow bed upper sections with design cover



in ABS, incl. mesh fabric

design covers □ 120 mm and rim in stainless steel, class K 3 / L 15. For tile thickness of 8-21 mm, with or without Lock & Lift System

			<b>Kessel</b> (Cl. L 15)	<b>Oval</b> (Cl. L 15)	<b>Spot</b> (Cl. K 3)	<b>Cross</b> (Cl. K 3)	<b>Festival</b> (Cl. K 3)	<b>Parade</b> (Cl. K 3)	<b>Slot</b> (Cl. K 3)	<b>Sticks</b> (Cl. K 3)
with <b>Lock &amp; Lift...</b>	<b>AISI 304</b>	Art. #	<b>48 904</b>	<b>48 905</b>	<b>48 621</b>	<b>48 613</b>	<b>48 615</b>	<b>48 624</b>	<b>48 619</b>	<b>48 617</b>
	<b>AISI 316L</b>	Art. #	<b>48 204</b>	-	-	-	-	-	-	-
without <b>Lock &amp; Lift...</b>	<b>AISI 304</b>	Art. #	<b>48 625</b>	<b>48 626</b>	<b>48 620</b>	<b>48 612</b>	<b>48 614</b>	<b>48 623</b>	<b>48 618</b>	<b>48 616</b>


## Upper section with design cover



in ABS

design covers □ 120 mm and rim in stainless steel, class K 3 / L 15 with or without Lock & Lift System


			<b>Kessel</b> (Cl. L 15)	<b>Oval</b> (Cl. L 15)	<b>Spot</b> (Cl. K 3)	<b>Cross</b> (Cl. K 3)	<b>Festival</b> (Cl. K 3)	<b>Parade</b> (Cl. K 3)	<b>Slot</b> (Cl. K 3)	<b>Sticks</b> (Cl. K 3)
with <b>Lock &amp; Lift...</b>	<b>AISI 304</b>	Art. #	<b>48 201</b>	<b>48 202</b>	<b>48 221</b>	<b>48 213</b>	<b>48 215</b>	<b>48 224</b>	<b>48 219</b>	<b>48 217</b>
	<b>AISI 316L</b>	Art. #	<b>48 203</b>	-	-	-	-	-	-	-
without <b>Lock &amp; Lift...</b>	<b>AISI 304</b>	Art. #	<b>48 225</b>	<b>48 226</b>	<b>48 220</b>	<b>48 212</b>	<b>48 214</b>	<b>48 223</b>	<b>48 218</b>	<b>48 216</b>

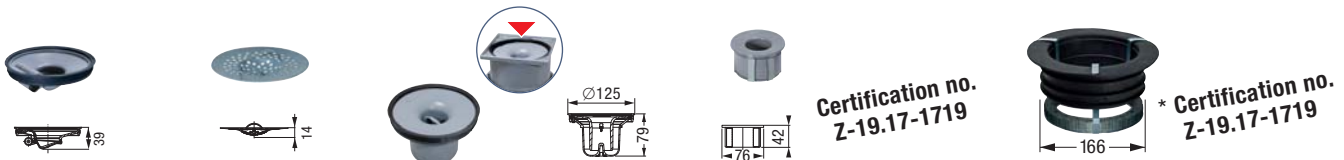

<b>Multistop</b>	<b>Hair filter</b>	<b>Odour trap</b>	<b>Fire-Kit Fire protection insert</b>	<b>Quick-Fit the passage seal</b>
odour, foam, rodent and insect stop Art. # <b>48 500</b>	made of polymer Art. # <b>48 700</b>	for all upper sections System 125, sealing water height 50 mm according to norm Art. # <b>48 600</b>	Only for <i>Ecoguss / Practicus</i> drains with vertical outlet and odour trap Ø <b>58/78/83</b> Art. # <b>48 099</b> Ø <b>50/75</b> Art. # <b>48 099</b> Ø <b>110</b> Art. # <b>48 100</b>	for core drillings for drain bodies with vertical outlet <b>*with fire protection</b> Art. # <b>48 990</b> (only in combination with <i>Fire-Kit</i> protection insert) <b>without fire protection</b> Art. # <b>48 991</b>

**Sludge trap**  
Art. # **48 168** see page 147

All drain bodies:  
1.8 l/sec flow rate  
Sealing water height 50 mm

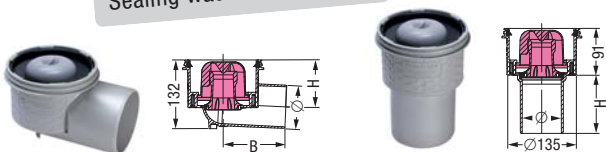

**Practicus in PP**  
with removable odour trap

<b>Lateral outlet</b>			
Ø	B	H	Article #
<b>50</b>	245	120	<b>45 150</b>
<b>75</b>	134	109	<b>45 170</b>
<b>110</b>	148	92	<b>45 110</b>
<b>Vertical outlet</b>			
<b>50</b>	100	<b>45 250</b>	
<b>75</b>	110	<b>45 270</b>	
<b>110</b>	110	<b>45 210</b>	



**Insulating body**  
fits all *Ecoguss / Practicus* drain bodies with vertical outlet  
Art. # **48 952**