



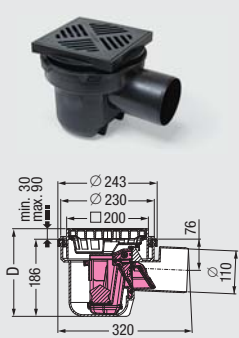


Volatile liquid traps with / without twin flap backwater valve

Volatile liquid traps		Products	
Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>1.0 l/sec flow rate Installation area 400 x 250 mm</p>	<p>Volatile liquid trap made of polymer</p> <p>With twin flap backwater valve, with integrated odour trap and sludge trap</p> <p><input type="checkbox"/> with slotted cover 188 x 188 mm made of polymer, black, class K 3 (able to withstand loads up to max. 300 kg).</p> <p>Installation depth (D) 216 - 276 mm</p> <p>EN 13564 Type 5 EN 1253-3 and 5</p>	Ø 110	52 101
 <p>1.0 l/sec flow rate Installation area 400 x 250 mm</p>	<p>Volatile liquid trap made of polymer</p> <p>With integrated odour trap and sludge trap</p> <p><input type="checkbox"/> with slotted cover 188 x 188 mm made of polymer, black, class K 3 (able to withstand loads up to max. 300 kg).</p> <p>Installation depth (D) 216 - 276 mm</p> <p>  EN 1253-3 and 5</p>	Ø 110	51 101

Installation example volatile liquid traps

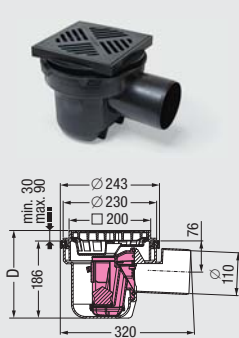

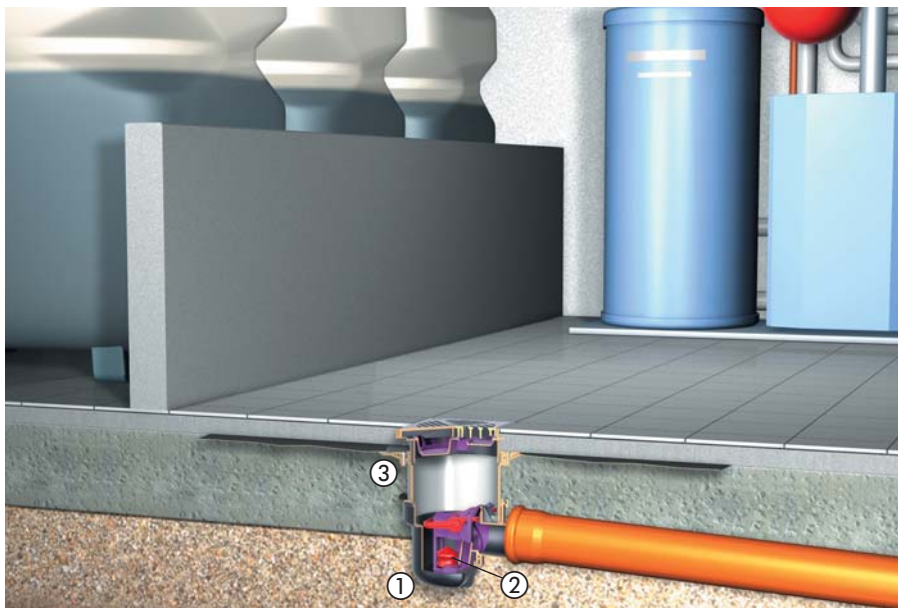Volatile liquid traps ① are the ideal drain for the boiler room in the basement. They use an integrated floater ② to guarantee reliable retention of volatile liquids escaping from heating systems and backwater flaps to prevent wastewater penetration from the sewage system. There is a special upper section ③ with extension available as an accessory for installation in waterproof concrete.

Professional advantages

- **Easy installation** with adjustable upper section (vertically and laterally adjustable)
- Sealing gasket between extension section and flange - Article # 27 298 (prevents floor moisture damage)
- **Waterproofing seal** - Article # 48 968
- **Cast iron cover** handles higher loads up to 12.5 tons (load class B) - Article # 48 985
- Upgradable to twin flap backwater valve
- **Quick and easy cleaning** with one-hand locking clasp