

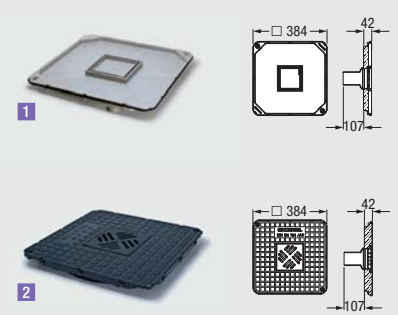


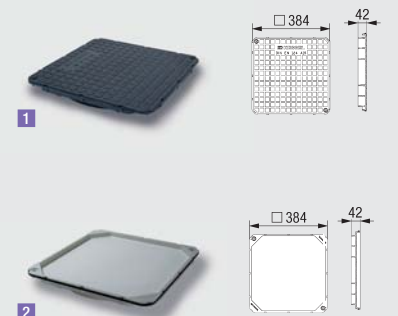


Pumpfix F / Staufix FKA / Staufix SWA / Controlfix			Accessories
Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
	<p><b>Inlet / Outlet</b></p> <p><b>1 Spigot</b></p> <p><b>2 Socket</b></p> <p><b>Removable inlets / outlets, can be mounted in various dimensions.</b> For use with all versions of the <i>Pumpfix F</i>, <i>Staufix FKA</i>, <i>Staufix SWA</i> and <i>Controlfix</i> for installation in a concrete slab/floor and in an exposed wastewater pipe.</p>	<p>Ø 110</p> <p>Ø 125</p> <p>Ø 160</p> <p>Ø 200*</p> <p>Ø 110</p> <p>Ø 125</p> <p>Ø 160</p> <p>Ø 200*</p>	<p><b>83 081</b></p> <p><b>83 082</b></p> <p><b>83 083</b></p> <p><b>83 084</b></p> <p><b>83 085</b></p> <p><b>83 086</b></p> <p><b>83 087</b></p> <p><b>83 088</b></p>
<p>For models made on or after Jan 2011</p> 	<p><b>Protective cover</b> for installation in an exposed wastewater pipe</p>	-	<b>83 031</b>
<p>For models made on or after Jan 2011</p> 	<p><b>Cover plate, surface water tight</b> Class A 15 With drain Ø 75, includes <b>Multistop</b> odour, foam, rodent and insect stop incl. gasket</p> <p><b>1 recessed for on-site tiling, grey,</b> for tile thicknesses of 18 mm</p> <p><b>2 with integrated grating, black</b></p> <p>For installation in an concrete floor.</p>	-	<p><b>83 045</b></p> <p><b>83 046</b></p>
	<p><b>Multistop</b> odour, foam, rodent and insect stop for article numbers: 83 045 and 83 046</p>	-	<b>43 500</b>
	<p><b>Hair filter</b> made of polymer for article numbers: 83 045 and 83 046</p>	-	<b>43 700</b>
	<p><b>Cover plate, surface water tight</b> Class A 15 made of polymer, incl. gasket Art. # 173-145</p> <p><b>1 black</b></p> <p><b>2 recessed for on-site tiling, grey,</b> for tile thicknesses of 18 mm</p> <p>For installation in an concrete floor.</p>	-	<p><b>83 050</b></p> <p><b>83 052</b></p>