



Pumpfix F / Staufix FKA / Staufix SWA			Accessories
Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
For models made on or after Jan 2011 	<b>Conversion kit Pumpfix F</b> With 5 m cable length <b>1 Pumpfix F Komfort</b> incl. Komfort control unit with recessed cover for on-site tiling and drain, class A 15, incl. <i>Multistop</i> incl. gasket for installation in a concrete slab/floor  <b>2 Pumpfix F Komfort</b> incl. Komfort control unit for installation in an exposed wastewater pipe	Ø 110-200*  Ø 110-200*	<b>80 098</b>  <b>80 097</b>
	<b>Conversion kit Staufix FKA Komfort</b> With 5 m cable length incl. Komfort control unit for installation in a concrete slab/floor and in an exposed wastewater pipe	Ø 110-200*	<b>80 093</b>
For models made on or after Jan 2011 	<b>Conversion kit Staufix SWA</b> for installation in a concrete slab/floor and in an exposed wastewater pipe	Ø 110-200*	<b>80 091</b>



### Simple retrofitting:

Within the complete series, all backwater protection components from **the drain body / clean out Controlfix** to the **Pumpfix F** backwater valve with integrated pump can be retrofitted easily later into the installed chamber, without tools being necessary.

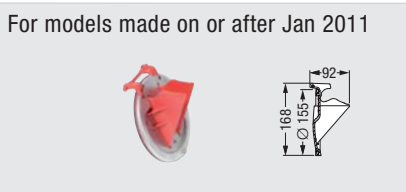
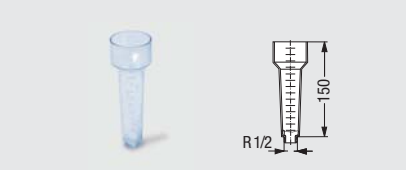


Clean out  
*Controlfix*

Twin flap  
backwater valve  
*Staufix SWA*

Backwater valve  
*Staufix FKA*

Backwater pumping  
station *Pumpfix F  
Komfort-Version*

For models made on or after Jan 2011 	<b>Rat protection flap</b> with stainless steel shield for <i>Staufix FKA Komfort</i> (with flap in pendulum position) and <i>Staufix SWA</i>	-	<b>80 037</b>
	<b>Testing funnel</b> with sealing gasket for servicing all <i>Staufix</i> backwater valves, suitable for Ø 110, 125, 160	-	<b>70 214</b>