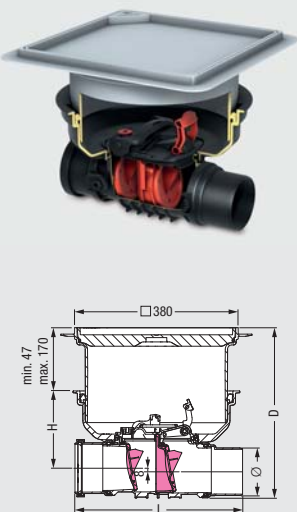




Staufix Control

with visual and acoustic warning




Installation in a concrete slab/floor

Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>Installation area 750 x 750 mm</p>	<p>Staufix Control twin flap backwater valve made of polymer, With emergency closure, for wastewater</p> <p><input type="checkbox"/> with visual and acoustic warning in the event of backwater</p> <p>Installation in the concrete slab</p> <p>1 With two polymer flaps, with tileable cover (X), class A 15</p> <p>2 With two polymer flaps, with black cover (S), class A 15</p> <p>3 With tileable cover (XR), class A 15, one polymer flap and one stainless steel flap as rat protection</p> <p>4 With black cover (SR), class A 15, one polymer flap and one stainless steel flap as rat protection</p> <p>Ø 90 L: 389 mm H: 179 mm Ø 110 L: 389 mm H: 179 mm Ø 125 L: 515 mm H: 222 mm Ø 160 L: 526 mm H: 205 mm Ø 200 L: 590 mm H: 185 mm</p> <p>Installation depth (D): Ø 90-110: 287 - 410 mm Ø 125-200: 341 - 464 mm</p> <p>Accessories: Additional audible alarm for further visual and acoustic warning See page 37 for article # 72 222</p>	<p>1 With two polymer flaps, with tileable cover</p> <p>Ø 90 Ø 110 Ø 125 Ø 160 Ø 200*</p> <p>2 With two polymer flaps, with black cover</p> <p>Ø 90 Ø 110 Ø 125 Ø 160 Ø 200*</p> <p>3 With tileable cover, one polymer flap and one stainless steel flap as rat protection</p> <p>Ø 90 Ø 110 Ø 125 Ø 160 Ø 200*</p> <p>4 With black cover, one polymer flap and one stainless steel flap as rat protection</p> <p>Ø 90 Ø 110 Ø 125 Ø 160 Ø 200*</p>	<p>770 090.10X 770 100.10X 770 125.10X 770 150.10X 770 200.10X</p> <p>770 090.10S 770 100.10S 770 125.10S 770 150.10S 770 200.10S</p> <p>770 090.10XR 770 100.10XR 770 125.10XR 770 150.10XR 770 200.10XR</p> <p>770 090.10SR 770 100.10SR 770 125.10SR 770 150.10SR 770 200.10SR</p>
			


Staufix Control

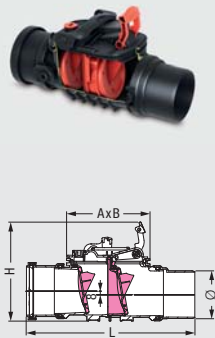with visual and acoustic warning

Installation in an exposed wastewater pipe

Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
	<p>Staufix Control twin flap backwater valve made of polymer, With emergency closure, for wastewater</p> <p><input type="checkbox"/> with visual and acoustic warning in the event of backwater</p> <p>1 With two polymer flaps</p> <p>2 With one polymer flap and one stainless steel flap as rat protection, (R)</p> <p>Ø 90 L: 386 H: 230 Ax B: 193 x 167 mm Ø 110 L: 389 H: 230 Ax B: 193 x 167 mm Ø 125 L: 515 H: 306 Ax B: 263 x 214 mm Ø 160 L: 526 H: 306 Ax B: 263 x 214 mm Ø 200 L: 590 H: 306 Ax B: 263 x 214 mm</p> <p>See page 37 for accessories</p>	<p>1 With two polymer flaps</p> <p>Ø 90 Ø 110 Ø 125 Ø 160 Ø 200*</p> <p>2 With one polymer flap and one stainless steel flap as rat protection</p> <p>Ø 90 Ø 110 Ø 125 Ø 160 Ø 200*</p>	<p>770 090 770 100 770 125 770 150 770 200</p> <p>770 090R 770 100R 770 125R 770 150R 770 200R</p>
			

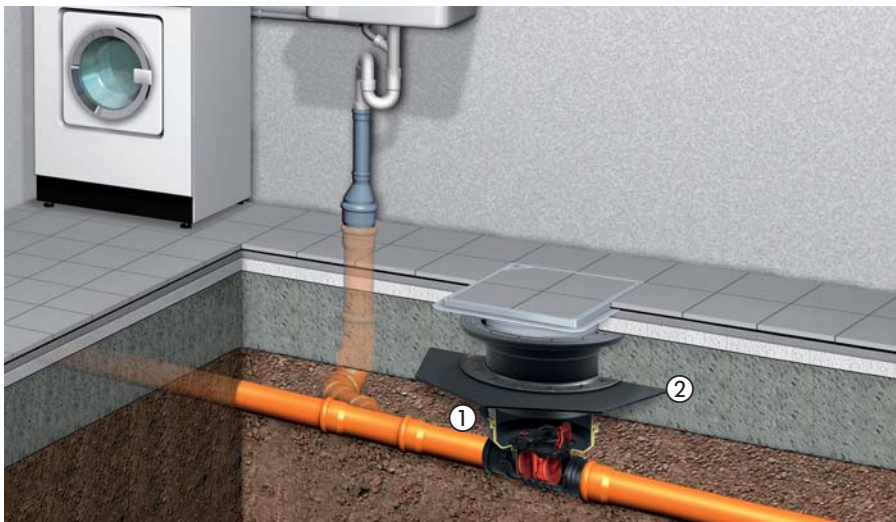Installation example *Staufix Control*



① Backwater valve ② Extension section

The new *Staufix* series can easily be installed in the concrete slab. The extension section with sealing flange also permits installation in waterproof concrete. The *Staufix Control* is equipped with an optical and acoustic alarm and in conjunction with a wireless receiver can deactivate the washing machine in the event of backwater.

Professional advantages




- **Tool-free servicing**
- **Everything made of polymer material - corrosion-free**
- **Backwater flap** made of stainless steel to keep rats and rodents out
- **Perfect for renovation**
Other valves with large drops are difficult to install. *Staufix* offers minimal drop between inlet/outlet (7 mm).
- Can be **retrofitted/converted** after installation.



Scan this QR code to directly view the corresponding product video.



Accessories - *Staufix*



Extension section

for deeper installation with flange
incl. sealing, max. extension: 147 mm
suitable for installation in the concrete slab/floor.

In case of deeper installation ensure maintenance capability!

Art. # **830 070**

Extension section

for deeper installation with flange and counter flange made of stainless steel
for connection to an on-site membrane incl. sealing, max. extension: 147 mm
suitable for installation in the concrete slab/floor.

In case of deeper installation ensure maintenance capability!

Art. # **830 073**

Extension section

with flange for installation in waterproof concrete

incl. sealing set, consisting of:
Counter flange made of stainless steel, incl. screws
Elastomer waterproofing membrane made of NK/SBR \varnothing 700 mm max. extension: 294 mm. Completely assembled.

suitable for installation in the concrete slab/floor.

Art. # **830 075**

Spigot

removable fitting mountable on both sides and in different dimensions

- \varnothing 90 Art. # **83 090**
- \varnothing 100 Art. # **830 200**
- \varnothing 110 Art. # **830 100**
- \varnothing 125 Art. # **83 082**
- \varnothing 160 Art. # **83 083**
- \varnothing 200 Art. # **83 084**



Socket

removable fitting mountable on both sides and in different dimensions

- \varnothing 90 Art. # **83 091**
- \varnothing 100 Art. # **830 202**
- \varnothing 110 Art. # **830 101**
- \varnothing 125 Art. # **83 086**
- \varnothing 160 Art. # **83 087**
- \varnothing 200 Art. # **83 088**



Radio-based audible alarm

for forwarding a visual and acoustic signal in the event of backwater,

suitable for the *Staufix Control*

Art. # **72 222**



Radio receiver as switched socket

for deactivating connected loads in the event of backwater (e. g. washing machine)

Art. # **72 223**



Rodent protection flap

as rat protection, made of stainless steel

suitable for Art. # 720..., 730... and 770...

- \varnothing 90-110 Art. # **70 233**
- \varnothing 125-200 Art. # **70 234**