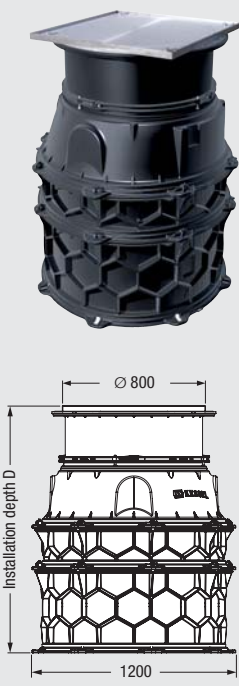


Pumping stations for wastewater with or without sewage


System chambers Ø 1000

With access opening Ø 800 mm

Illustration and dimensioned drawing	Article description	Installation depth mm	Article #
<p>For underground installation</p> 	<p>Engineering system chamber for combination with the engineering system base <i>Aqualift F XL-</i> and <i>Aqualift S XL</i> for underground installation made of polyethylene</p> <p><input type="checkbox"/> with access opening Ø 800 mm</p> <p>1 Upper section with square cover, made of stainless steel, class A/L 15, anti-slip</p> <p>2 Upper section with square cover, made of stainless steel, class A/L 15 Cover tileable</p> <p>Covers surface water tight</p> <div style="border: 1px solid black; border-radius: 15px; padding: 5px; text-align: center; margin: 10px 0;"> Upper sections with covers class B / D on request </div> <p>Handles groundwater depths up to 3000 mm Delivered as individual elements Removable access aid article # 860 126 on request</p> <p>In compliance with EN 13598 Part 2 Certification: Z-42.1-527</p>	<p>1</p> <p>D 1: 396 - 645 D 2: 646 - 895 D 3: 896 - 1145 D 4: 1146 - 1395 D 5: 1396 - 1645 D 6: 1646 - 1895 D 7: 1896 - 2145 D 8: 2146 - 2395 D 9: 2396 - 2645 D 10: 2646 - 2895 D 11: 2896 - 3145 D 12: 3146 - 3395 D 13: 3396 - 3645 D 14: 3646 - 3895 D 15: 3896 - 4145</p> <p>2</p> <p>D 1: 411 - 660 D 2: 661 - 910 D 3: 911 - 1160 D 4: 1161 - 1410 D 5: 1411 - 1660 D 6: 1661 - 1910 D 7: 1911 - 2160 D 8: 2161 - 2410 D 9: 2411 - 2660 D 10: 2661 - 2910 D 11: 2911 - 3160 D 12: 3161 - 3410 D 13: 3411 - 3660 D 14: 3661 - 3910 D 15: 3911 - 4160</p>	<p>874 00 04 874 00 10 874 00 16 874 00 22 874 00 28 874 00 34 874 00 40 874 00 46 874 00 52 874 00 58 874 00 64 874 00 70 874 00 76 874 00 82 874 00 88</p> <p>874 00 02 874 00 08 874 00 14 874 00 20 874 00 26 874 00 32 874 00 38 874 00 44 874 00 50 874 00 56 874 00 62 874 00 68 874 00 74 874 00 80 874 00 86</p>

System chambers Ø 1000

With access opening Ø 800 mm

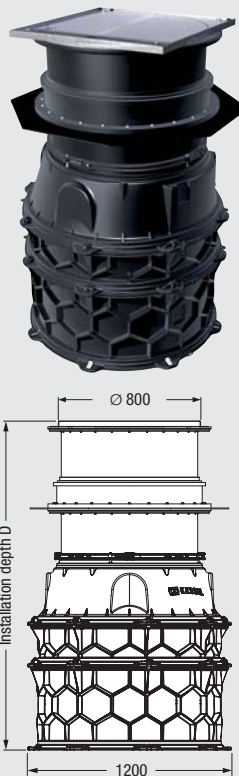Illustration and dimensioned drawing	Article description	Installation depth mm	Article #
<p>For installation in a concrete slab</p> 	<p>Engineering system chamber for combination with the engineering system base <i>Aqualift F XL-</i> and <i>Aqualift S XL</i> for underground installation made of polyethylene</p> <p>Version for waterproof concrete with flange and counter flange</p> <p><input type="checkbox"/> with access opening Ø 800 mm</p> <p>1 Upper section with cover, square made of stainless steel, class A/L 15 Cover tileable</p> <p>2 Upper section with cover, square made of stainless steel, class A/L 15, anti-slip</p> <p>Covers surface water tight</p> <p>Handles groundwater depths up to 3000 mm Delivered as individual elements Removable access aid article # 860 126 on request</p> <p>In compliance with EN 13598 Part 2 Certification: Z-42.1-527</p>	<p>1</p> <p>D 1: 628 - 877 D 2: 878 - 1127 D 3: 1128 - 1377 D 4: 1378 - 1627 D 5: 1628 - 1877</p> <p>2</p> <p>D 1: 613 - 862 D 2: 863 - 1112 D 3: 1113 - 1362 D 4: 1363 - 1612 D 5: 1613 - 1862</p>	<p>874 00 03 874 00 09 874 00 15 874 00 21 874 00 27</p> <p>874 00 05 874 00 11 874 00 17 874 00 23 874 00 29</p>

Upper sections with covers class B / D on request