



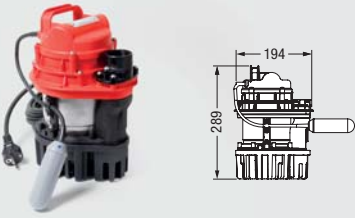


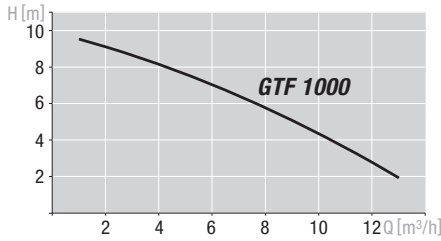

## GTF 1000

Illustration and dimensioned drawing	Article description	Pressure connection	Article #																
	<p><b>Submersible pump GTF 1000</b> for wastewater without sewage <b>with/without</b> float switch Connection to pressure pipe 1 1/4 inch. Outlet side / vertical, without macerator, cable length 10 m</p> <p><input type="checkbox"/> <b>without float switch</b> <input type="checkbox"/> <b>with float switch</b></p> <p>Voltage: 230 V ~ 50 Hz Input power (P1): 1080 W Max. pumping height: 10 m Max. pumping capacity: 11,5 m<sup>3</sup>/h Max. submersible depth: 10 m Max. particle size: 10 mm Pressure connection: 1 1/4 inch side / vertical</p>	1 1/4 inch	<b>28 760</b>																
		1 1/4 inch	<b>28 860</b>																
		<table border="1"> <thead> <tr> <th colspan="2">GTF 1000</th> </tr> </thead> <tbody> <tr> <td>Current type</td> <td>Alternating current</td> </tr> <tr> <td>Voltage</td> <td>230 V</td> </tr> <tr> <td>Current</td> <td>4.9 A</td> </tr> <tr> <td>Power P1/P2</td> <td>1080 W / 620 W</td> </tr> <tr> <td>RPM</td> <td>2800 min<sup>-1</sup></td> </tr> <tr> <td>Motor protection</td> <td>integrated</td> </tr> <tr> <td>Operating mode</td> <td>S3 - 30 %</td> </tr> </tbody> </table>		GTF 1000		Current type	Alternating current	Voltage	230 V	Current	4.9 A	Power P1/P2	1080 W / 620 W	RPM	2800 min <sup>-1</sup>	Motor protection	integrated	Operating mode	S3 - 30 %
GTF 1000																			
Current type	Alternating current																		
Voltage	230 V																		
Current	4.9 A																		
Power P1/P2	1080 W / 620 W																		
RPM	2800 min <sup>-1</sup>																		
Motor protection	integrated																		
Operating mode	S3 - 30 %																		
																			

## KTP 500

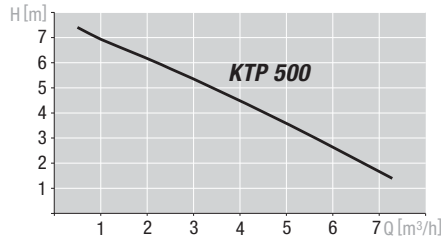Illustration and dimensioned drawing	Article description	Pressure connection	Article #																
	<p><b>Submersible pump KTP 500 / KTP 500 TITAN</b> for wastewater without sewage <b>with/without</b> float switch Connection to pressure pipe 1 1/4 inch. Outlet side / vertical, cable length 10 m</p> <p><b>1</b> <b>without float switch</b> <b>2</b> <b>with float switch</b></p> <p>Voltage: 230 V ~ 50 Hz Input power (P1): 480 W Max. pumping height: 8 m Max. pumping capacity: 8 m<sup>3</sup>/h Max. submersible depth: 10 m Max. particle size: 10 mm Pressure connection: 1 1/4 inch side / vertical</p> <p><b>Special model with titanium shaft</b> Suitable for mechanical and chemical polluted media. Also resistant to chloride-containing media. Not to be used for nitro- and trichloroethylene</p>	<b>KTP 500</b>																	
		<b>1</b> 1 1/4 inch	<b>28 710</b>																
		<b>2</b> 1 1/4 inch	<b>28 810</b>																
		<b>KTP 500 TITAN</b>																	
<b>1</b> 1 1/4 inch	<b>28 750</b>																		
<b>2</b> 1 1/4 inch	<b>28 850</b>																		
		<table border="1"> <thead> <tr> <th colspan="2">KTP 500</th> </tr> </thead> <tbody> <tr> <td>Current type</td> <td>Alternating current</td> </tr> <tr> <td>Voltage</td> <td>230 V</td> </tr> <tr> <td>Current</td> <td>2.12 A</td> </tr> <tr> <td>Power P1/P2</td> <td>480 W / 320 W</td> </tr> <tr> <td>RPM</td> <td>2800 min<sup>-1</sup></td> </tr> <tr> <td>Motor protection</td> <td>integrated</td> </tr> <tr> <td>Operating mode</td> <td>S1</td> </tr> </tbody> </table>		KTP 500		Current type	Alternating current	Voltage	230 V	Current	2.12 A	Power P1/P2	480 W / 320 W	RPM	2800 min <sup>-1</sup>	Motor protection	integrated	Operating mode	S1
KTP 500																			
Current type	Alternating current																		
Voltage	230 V																		
Current	2.12 A																		
Power P1/P2	480 W / 320 W																		
RPM	2800 min <sup>-1</sup>																		
Motor protection	integrated																		
Operating mode	S1																		
