


Upper section for PVC floorings

Variofix shallow bed upper sections




in stainless steel AISI 304

with cover \varnothing 133 mm
in stainless steel AISI 304,
class L 15, screwed.
For use with 1-4 mm PVC / vinyl flooring.

Art. # 59 192

Custom made product (delivery time on request)

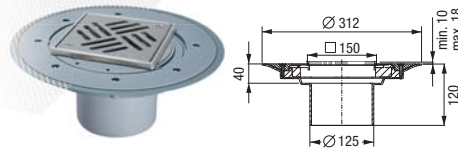


in ABS, incl. mesh fabric

with slotted cover/rim \square 138 mm
in stainless steel,
class L 15, screwed.
For tile thickness of 8-16 mm.

AISI 304 Art. # 48 963

AISI 316L Art. # 48 206

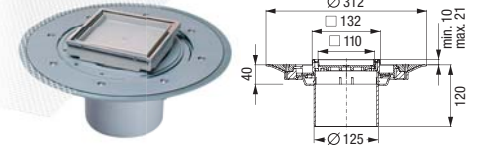


with recessed polymer cover
for on-site tiling \square 110 mm
rim in stainless steel,
class K 3, with locking system

AISI 304 Art. # 48 906

AISI 316L Art. # 48 208

Upper sections




in ABS...

with slotted cover/rim
 \square 138 mm
in stainless steel
screwed, class L 15

AISI 304 Art. # 48 951

AISI 316L Art. # 48 205



in ABS...

with slotted cover
 \square 120 mm
in stainless steel AISI 304
class K 3

Art. # 48 165



in ABS...

with slotted cover \square 138 mm, class K 3,
in stainless steel,
screwed

AISI 304 Art. # 48 950

AISI 316L Art. # 48 209

in ABS,
black

Art. # 48 193



in ABS, tileable...

\square 110 mm, made of polymer, class K 3
with rim
in stainless steel


AISI 304 Art. # 48 211

AISI 316L Art. # 48 207

with rim
in polymer

Art. # 48 210

Accessories




Waterproofing flange

with counter flange, in ABS,
 \varnothing 348 mm (also for compound seal)

Art.Nr. 48 410

can be combined with drain bodies
and extension sections




Pressure sealing flange

in stainless steel AISI 304, \varnothing 273 mm,
with seeping water opening

Art. # 48 402


can be combined with drain bodies
and extension sections

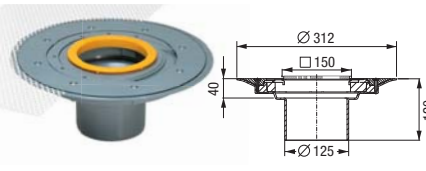

Intermediate section with glue flange

in ABS, for shallow bed gasket
incl. mesh fabric

Art. # 48 900

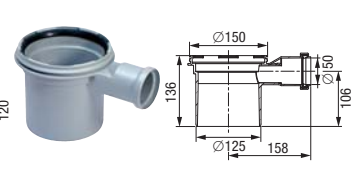

Extension section

in PP, with lip seal
without lateral inlet
Art. # 48 987

with lateral inlet \varnothing 50
Art. # 48 989

Mesh fabric
for Art. # 48 410
Art. # 680 351

Elastomer waterproof membrane in NBR
for Art. # 48 402
Art. # 48 981



Drain bodies *Ecoguss* and *Practicus*

All drain bodies:
1.8 l/sec / 1.1 l/sec* flow rate
Sealing water height 50 mm



Ecoguss

with removable odour trap



Lateral outlet			
\varnothing	B	H	Article #
58	245	120	48 358
78	134	109	48 378
83	134	108	48 383
110	148	92	48 311
Vertical outlet			
58	100		48 458
78	110		48 478
83	110		48 483
110	110		48 411

* 20 mm threshold / 10 mm threshold