
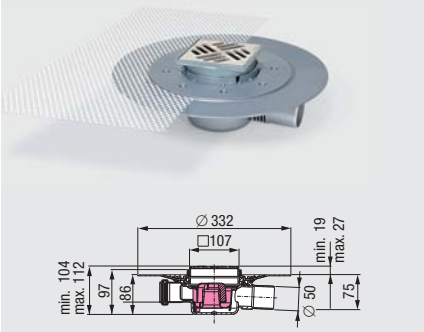
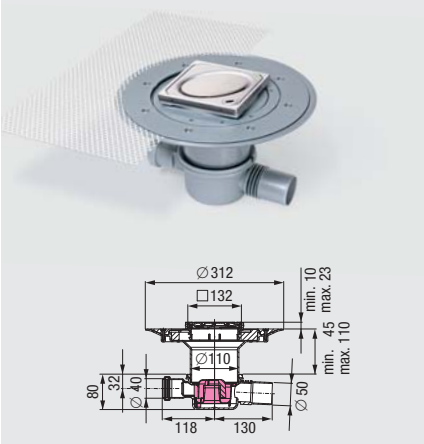
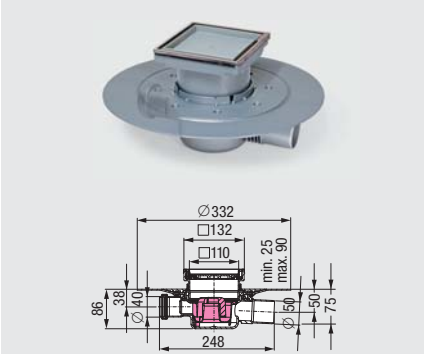
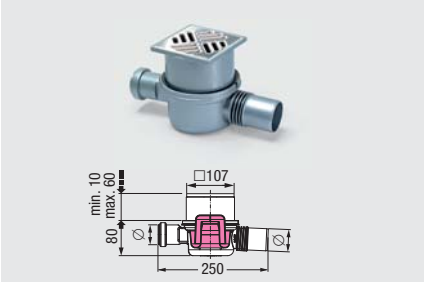


"The Superflat"

Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>0.8 l/sec flow rate Installation area 260 x 180 mm</p>	<p>Bathroom drain "The Superflat" in PP for shallow bed gasket with lowest installation height sound-absorbing, Ø 50 flexible lateral outlet 2.5°, with lateral inlet Ø 40 and fixed lip seal. With removable odour trap, glue flange with mesh fabric for shallow bed sealing With upper section in ABS</p> <p><input type="checkbox"/> with slotted cover 100 x 100 mm in stainless steel AISI 304, class K 3 (able to withstand loads up to max. 300 kg).</p>	<p>Ø 50</p>	<p>42 701.91</p>
 <p>Illustration shows design cover <i>Oval</i></p> <p>0.8 l/sec flow rate Installation area 260 x 180 mm</p>	<p>Bathroom drain "The Superflat" in PP sound-absorbing, Ø 50 flexible lateral outlet 2.5°, with lateral inlet Ø 40 and fixed lip seal. With Variofix shallow bed upper section in ABS, with removable odour trap, with mesh fabric for shallow bed sealing</p> <p>1 with design cover <i>Oval</i> 120 x 120 mm and rim in stainless steel AISI 304, for tile thicknesses of 8-21 mm, class L 15 (able to withstand loads up to max. 1.5 to), with <i>Lock & Lift</i> System.</p> <p>2 with standard slotted cover 95 x 95 mm in stainless steel AISI 304, for tile thicknesses of 6-14 mm, class K 3 (able to withstand loads up to max. 300 kg).</p>	<p>Ø 50</p> <p>Ø 50</p>	<p>42 701.54</p> <p>42 701.50</p>
 <p>0.8 l/sec flow rate Installation area 260 x 180 mm</p>	<p>Bathroom drain "The Superflat" in PP sound-absorbing, Ø 50 flexible lateral outlet 2.5°, with lateral inlet Ø 40 and fixed lip seal. With removable odour trap, with glue flange and counter flange</p> <p>With upper section in ABS</p> <p><input type="checkbox"/> with recessed polymer drain cover for on-site tiling 110 x 110 mm and rim in stainless steel AISI 304, class K 3 (able to withstand loads up to max. 300 kg), with locking system, for tile thickness up to 10 mm.</p>	<p>Ø 50</p>	<p>42 701.95</p>
 <p>0.8 l/sec flow rate Installation area 260 x 180 mm</p>	<p>Bathroom drain "The Superflat" in PP sound-absorbing, Ø 50 flexible lateral outlet 2.5°, with lateral inlet Ø 40 and fixed lip seal. With removable odour trap</p> <p>With upper section in ABS</p> <p><input type="checkbox"/> with slotted cover 100 x 100 mm in stainless steel AISI 304, min. installation height 90 mm, class K 3 (able to withstand loads up to max. 300 kg).</p>	<p>Ø 50</p>	<p>42 701.20</p>

Installation example *"The Superflat"*

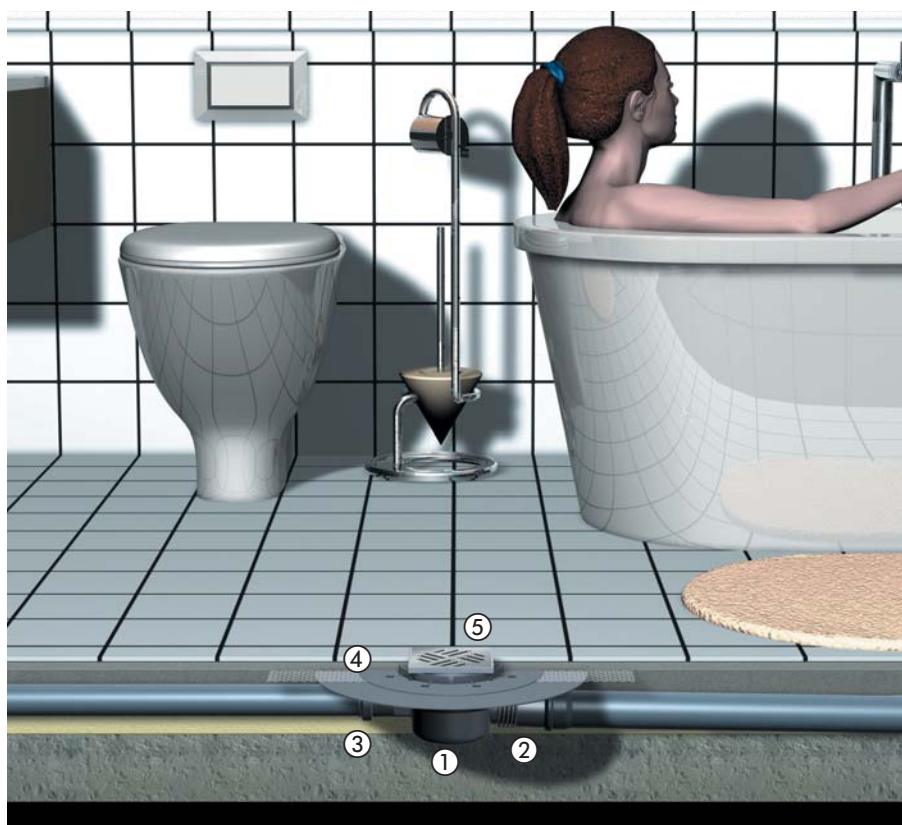

- | | |
|----------------------------------|-------------------|
| ① "The Superflat" bathroom drain | ④ Adhesive flange |
| ② Outlet | ⑤ Cover |
| ③ Inlet | |

With its installation height of only 95 mm *"The Superflat"* bathroom drain is ideally suitable for both new buildings and renovation work. It has a flexible horizontal outlet \varnothing 50 mm with sound decoupling and a lateral inlet \varnothing 40 mm for the connection of other drainage fixtures. There is an adhesive flange available as an option for humidity sealing. The cover is a slotted stainless steel cover - but *"The Superflat"* drain can also be combined with any other upper section from the System 100 range.

Professional advantages

- **Variable upper section**
rotatable, tiltable and height adjustable
- **Minimum installation height**
- **Flexible outlet** with sound absorption
- With **removable odour** trap - full access for maintenance and cleaning
- Versions with single or triple inlets.
- **Flexible modular system** with a large number of design covers (see page 184 - 185).
- **Sealing system safe to install**
The fixed lip seal reliably prevents the upper section from slipping
- Select, plan and visualize your own personalized KESSEL Design shower drainage system using the KESSEL Shower Drain Configurator at



www.kessel-design.com



SmartSelect makes planning quite simply quicker - visit smartselect.kessel.com for the configurator for alternative waterproofing options.