
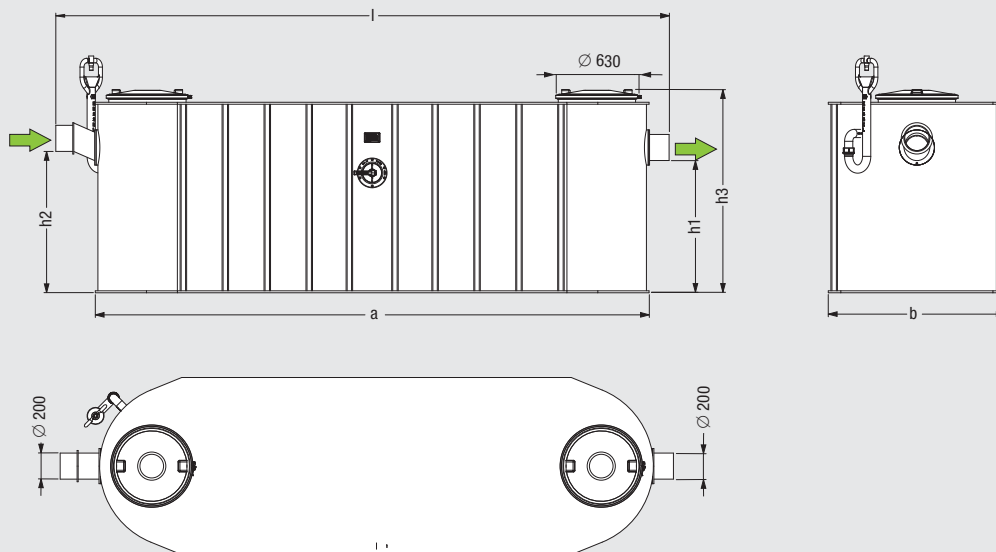


Grease separators for free-standing installation

Euro Basic (G)

NS 15 - 30

Illustration	Article description	NS	Article #
 <p>Certification: Z-54.1-473</p> <p>Delivery: System completely assembled.</p> <p>Accessories: Inspection window and refill inlet, Sampling chamber, lifting station.</p> <p>Upgradable to PV+S Auto Mix & Pump, see page 275</p>	<p>Grease separator Basic (G) NS ...</p> <p><input type="checkbox"/> basic version, according to Euro Norm EN 1825 and DIN 4040, non-recycled polyethylene</p> <p>For free-standing installation in frost-protected areas, with integrated sludge trap, two domed covers made of polymer, with quick-release closure, sealed odour-tight.</p> <p>Inlet and outlet \varnothing 200 mm for the connection to PE-HD pipes according to DIN 19537, HT pipes according to DIN 19560, PP or AS.</p> <p>Model type: Right, can be changed to the left-hand model type by replacing the inlet and outlet connecting pipes.</p>	<p>NS 15 NS 20 NS 25 NS 30</p>	<p>without SonicControl</p> <p>without accessories</p> <p>93 015.01 93 020.01 93 025.01 93 030.01</p>



\varnothing = Outer diameter
b1 = Set-up dimensions

Technical note see page 283

Nominal size	\varnothing	a	Installation dimensions			h1	h2	h3	Sludge	Grease	Total (including water)
			l	x	b						
NS 15	200	3300	3560		1350	1130	1200	1625	1500 l	600 l	2600 l
NS 20	200	4250	4510		1350	1030	1100	1525	2000 l	800 l	3370 l
NS 25	200	4500	4760		1350	1030	1100	1525	2500 l	1000 l	3700 l
NS 30	250	4600	4860		1350	1170	1240	1625	3000 l	1200 l	4370 l