

Shower channel *Linearis Comfort*

with cover and rim in stainless steel AISI 304



Made in ABS


With lateral outlet Ø 50, removable odour trap, installation supports and with factory-mounted waterproofing membrane according to EN 1253-1 and DIN 18534-1-W3-I.

Drainage capacity 1.1 l/sec / 1.0 l/sec with 10 mm / without threshold.

Sealing water height 22 mm

Cover:

Cover and rim in stainless steel AISI 304 (Channel cover can be reversed and tiled on site), for tile thickness 7 – 22 mm, class K 3, with seeping water opening

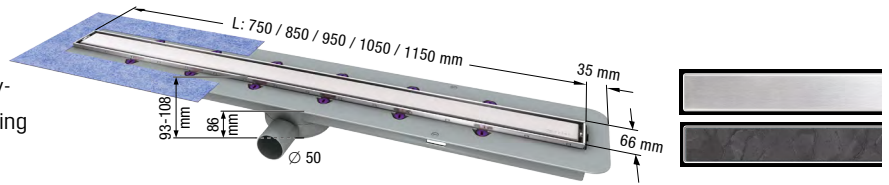

Channel length in mm	Art. no.
750	45 600.83M
850	45 600.84M
950	45 600.85M
1050	45 600.86M
1150	45 600.87M

Shower channel upper section *Linearis Comfort*

with cover and rim in stainless steel AISI 304



Made in ABS


Minimum installation height of upper section excl. drain body 46 mm, with removable odour trap, installation supports and with factory-mounted waterproofing membrane according to EN 1253-1 and DIN 18534-1-W3-I.

Drainage capacity 1.1 l/sec / 1.0 l/sec with 10 mm / without threshold.

Sealing water height 50 mm

Cover:

Cover and rim in stainless steel AISI 304 (Channel cover can be reversed and tiled on site), for tile thickness 7 – 22 mm, class K 3, with seeping water opening

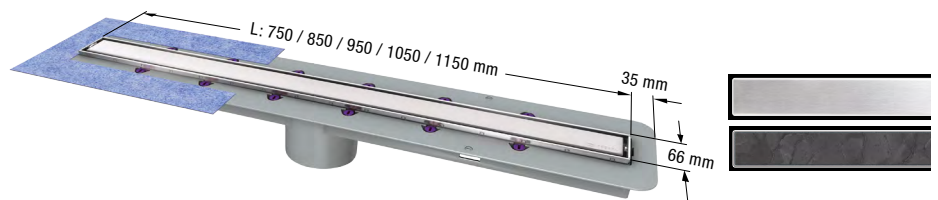

Channel length in mm	Art. no.
With factory-mounted waterproofing membrane	
750	48 928M
850	48 929M
950	48 930M
1050	48 931M
1150	48 932M