
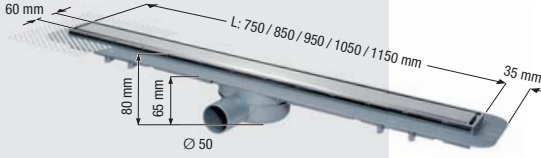



Shower channels




Complete channels

Linearis Compact


Illustration and dimensioned drawing	Article description	Channel length	Article #
<p>Installation depth only 80 mm</p>  <p>Channel length from 300 to 650 mm</p>	<p>Shower channel <i>Linearis Compact</i> With drain body in ABS, Ø 50, lateral outlet With removable odour trap, sealing water height 22 mm</p> <p><input type="checkbox"/> cover and rim in stainless steel AISI 304 (Channel cover can be reversed and tiled on site), class K 3, seeping water openings prepared</p>	300 mm 450 mm 550 mm 650 mm 750 mm 850 mm 950 mm 1050 mm 1150 mm	45 600.59 45 600.60 45 600.61 45 600.62 45 600.63 45 600.64 45 600.65 45 600.66 45 600.67
 <p>Channel length from 750 to 1150 mm</p>	<p>Installation supports and mesh fabric included</p>		<p>0.5 l/sec flow rate without threshold, 0.6 l/sec flow rate with 10 mm threshold</p>

Linearis Compact

Accessories

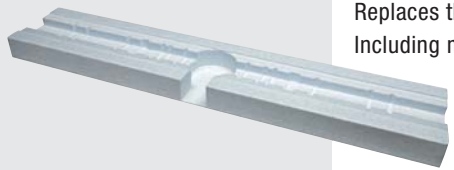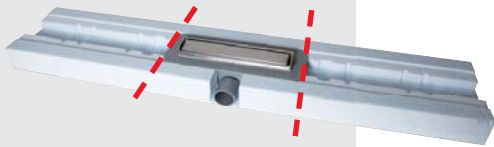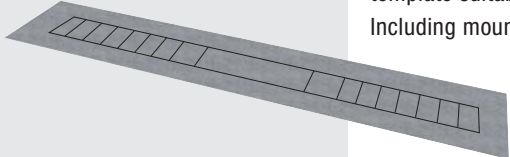Illustration and dimensioned drawing	Article description	Channel length	Article #
 <p>Example: Installation aid can be shortened on-site Suitable for all channel lengths from 300 to 1150 mm</p> 	<p>Installation aid Replaces the screed underlining Including mounting adhesive</p> <p><input type="checkbox"/> Linearis Compact Suitable for all lengths, can be shortened on-site</p>	-	48 639
	<p>Collar seal As a seal below the ceramic surfaces made of modified polyethylene membrane with fleece on both sides with printed cutting template suitable for all channel lengths Including mounting adhesive</p>	-	48 638

Installation example *Linearis Compact*

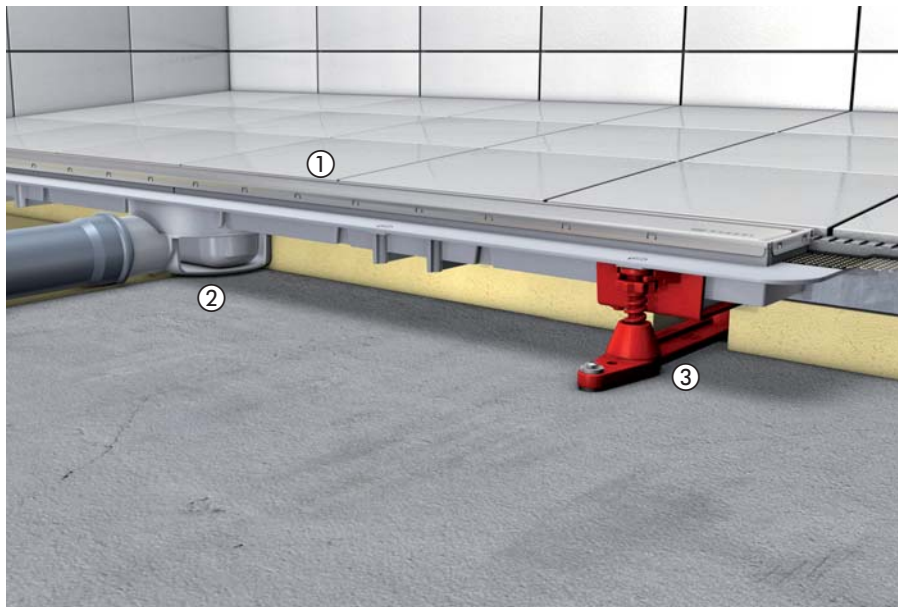


① Channel cover
② Drain body
③ Installation supports

Shower channels in a classic, timeless design. Minimalistic impression fits elegantly in a purist bathroom design. The finely finished channel surface in stainless steel can be reversed to offer a recessed side where the bathroom tile or natural stone surface can be installed. The channels are ready-to-install with their welded on drain body, including an odour trap and Ø 50 outlet. *Linearis Compact* can be installed on the room or wall side of the shower. The flexible installation supports can be shortened for wall-side installation.

Professional advantages

- **Stainless steel cover is reversible and tileable**
- **Installation in the room or on the wall**
The length of the feet can be shortened on the left or right if mounted to the wall.
- **Hygienic design** - single piece body and channel cover
- **Channel length:** 300 mm, 450 mm, 550 mm, 650 mm, 750 mm, 850 mm, 950 mm, 1050 mm, 1150 mm.
- **Flow rate** with counter slope **up to 0.6 l/sec with 10 mm threshold. Flow rate increased to 0.9 l/sec** with use of **Multistop** odour trap.
- **Cover and rim** made of stainless steel.
- **Multistop (optional)** - odour, foam, rodent and insect stop
- **Hair filter (optional)**



SmartSelect makes planning quite simply quicker - visit smartselect.kessel.com for the configurator for alternative waterproofing options.

Linearis Compact

Accessories

Illustration and dimensioned drawing	Article description	Channel length	Article #
<p>Illustration shows ①</p>	Odour trap ① sealing water height 22 mm ② sealing water height 50 mm only for shower channel <i>Linearis Compact</i> and <i>Linearis Comfort</i>	-	48 603 48 602
	Multistop odour, foam, rodent and insect stop	-	48 400
	Hair filter	-	48 800
	Sound protection elements for <i>Linearis Compact</i> installation supports H = 10 mm, 2 pcs.	-	48 630